




Included In Your Package



GPS TRACKING DEVICE

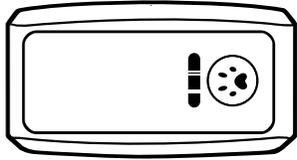

NYLON COLLAR

USB POWER
ADAPTERCHARGING
CABLE

Getting Started

Charge it up: Using the power adapter and cable provided, plug the collar into any electrical outlet in your home and charge for 3 hours, or until the red light disappears.



Get a Signal

1. **Wake the collar up** by pressing the power button for 3 seconds
2. **Wait for the *blue* LED light to begin flashing**
3. Success! This indicates that the collar has found a reliable signal and can now start sharing its location with you
4. If you're having any trouble getting a signal indoors, try taking it outside with a clear view of the sky

Fit the Collar

Using the strap that came with your collar:

1. Remove the buckle and clamping lock from the strap
2. Slip the strap through the openings on the bottom of the collar
3. Thread the clamping lock back on the strap
4. Thread the buckle back on the strap
5. Adjust collar by pulling on strap to desired length and feeding leftover strap through clamping lock

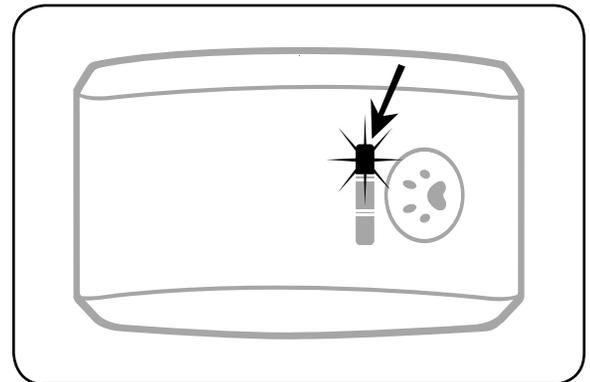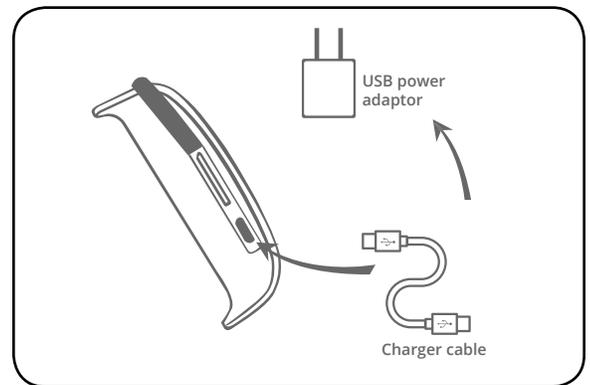

Nylon Collar



Understanding your SIM card plan

DO NOT REMOVE YOUR SIM CARD! Your SIM card was properly setup and installed by our technicians, so there is no reason to remove it. Good Life is not responsible for lost or damaged SIM cards.

For help with your SIM card, call 1-877-778-2106

If you need a REPLACEMENT, call 1-800-657-8214 to order a new SIM card and obtain instructions on how to set it up.

Your collar is connected to T-Mobile's cellular network on a *prepaid \$3 per month plan*. We have already signed you up with automatic monthly deductions so that you always have money in your account.

This plan gives you 30 location texts from your collar per month. While Good Life is excited to provide you with a cutting edge GPS collar, we don't have our own big fancy cellphone towers. We rely on T-Mobile's cellular network to run the service. If you exceed your limit of 30 texts per month, simply call T-Mobile customer service and add \$10 more to your account. You will then be charged the normal 10 cents for each text message you receive from your collar.

To check the number of prepaid texts your collar has left, call: 1-877-720-5195. Have your collar's phone number and pin number ready. Say "Dollars and Minutes Remaining" to hear your balance. Each text is 10 cents each, so divide your balance by .1 to get your remaining texts.

Useful Tips

Plan ahead by checking how many texts you have and by looking at the coverage map to see if your collar will have service.

Don't let your pet go swimming with the collar on. The collar is splash resistant but not completely waterproof.

CALLING THE COLLAR

Think of your collar like a cell phone: it requires a cell signal to communicate with you.

After turning the collar on, wait for the blue light to begin flashing before calling. If you call the collar before the blue light begins flashing, the collar may not respond as it has not connected to the GPS and Cell signals.

Call your collar's phone number using a smartphone. Once you hear the voice mail greeting, hang up. The collar will respond shortly with a text message that includes a Google Maps link. Remember that you need an Internet browser on your phone to view the link. You can use this link to view or share the pet's location.

Going somewhere? Plan if your GPS collar will be in range of communication by viewing this coverage map: <https://prepaid-phones.t-mobile.com/prepaid-coverage> and typing in the location of your pet. As long as the area is pink, the collar will be able to communicate with your phone.

MANAGE YOUR TEXTS AND SIM CARD

DO NOT remove the SIM card. Your SIM card has been properly setup and installed, there is no reason to remove it. Good Life is not responsible for lost or damaged SIM cards. If you need a replacement, call 1-800-657-8214, and we will send you a new one and instructions on how to set it up.

Be mindful of how many texts your collar is sending. Each Text message your SIM card sends and receives will count as 10 cents against the Prepaid plan. You only have a certain amount based on the balance on the card, so check ahead of time.

Add more texts to your plan by calling 1-877-778-2106. You will need your collar's phone number and your name.

Plan ahead! To check the number of prepaid texts your collar has left, call: 1-877-778-2106. You will need your collar's phone number and your name. *DO NOT leave a voice mail.*

BATTERY LIFE

Fully charge the collar before leaving it on your pet. This way if your pet does go missing, you'll have the most time and the best opportunity to find them again. With daily use, your collar can last up to 3 weeks on a single charge.

Plan ahead for the remaining battery life of your collar by looking at the **Bat: %** in the collar's location text message.

SLEEP MODE

Your collar will automatically go into sleep mode after 5 minutes of inactivity. Don't worry, it can still find your dog's location. Sleep mode saves battery life by temporarily switching off communication modes until you need to find your dog. You'll know your collar is in sleep mode if all the lights are off.

If you send a message or call while in sleep mode, it can take up to 5 minutes for your collar to wake up, obtain a cell signal, and respond to your call. Tap the on/off button once to wake your collar up from Sleep mode.

ADVANCED TEXT COMMANDS

Advanced Text Commands are helpful tools you can use to control the way you use your GPS collar.

Applying each change with an Advanced Text Command will count as 2 texts on your plan:

One for the incoming text, one for the outgoing text.

Set Authorized Number

By default, any phone number can call the collar to obtain its location. Use this command to ensure only your phone number or other authorized phone numbers can retrieve your GPS collar's location.

To allow a specific phone number to receive texts from the collar, text **admin123456** followed by your 10-digit phone number.

Example: **admin123345 999-555-1234**

The collar will respond with **admin ok** indicating the change has been made.

Cancel Authorized Number

To cancel your number as an authorized number:

1. Text "noadmin1233456"
2. The collar will respond with "noadmin ok" indicating the change has been made

Change Timestamp

1. Text **timezone123456** followed by your universal time zone number such as "-8" to the collar (see the chart below for examples).
2. The collar will respond with **time ok** indicating the change has been made

Time Zone	Text Command
Hawaii-Aleutian	timezone123456 -10
Alaska	timezone123456 -9
Pacific	timezone123456 -8
Mountain	timezone123456 -7
Central	timezone123456 -6
Eastern	timezone123456 -5

Troubleshooting & Tips

My Collar is not responding to my call.

Here are some of the most common reasons:

1. You have reached your monthly limit of 30 text messages
 - Add more texts to your plan by calling 1-877-778-2106. You will need your Collar's phone number and T-Mobile PIN number.
2. Your collar is out of cell service range
 - Wait and try again later
3. The collar's battery is dead
 - Recharge the battery and try calling again once it's fully charged
4. The collar has not found a signal yet
 - Wait a few minutes longer for the blue light to begin flashing, or try again later

My collar is not turning off when I press the power button.

Your collar automatically goes into power-save sleep mode after 5 minutes. Because of this feature, there is no need to manually turn the collar off. Use the power button to wake up the collar from sleep mode by pressing it for one to three seconds.

The blue light is not flashing.

If the blue light is not flashing, your collar is searching for a GPS signal. Try taking the collar outside or to a place that has a clear line of site to the sky. Once your collar obtains a signal, the blue light will begin flashing and is ready to work.

Returns & Exchanges

Don't worry, we've got you covered! Your purchase is backed by our 45 Day Money Back Guarantee and 1 Year Protection Plan. In the unlikely event you need to use either of these, just contact us and we'll make it right. Please visit www.goodlifeinc.com/returns or contact us using the information below for full details.

We're Here to Help

Toll Free: 1-800-657-8214

Website: www.UltimateBarkControl.com

Outside US: 1-541-245-4488

Email: customerservice@goodlifeinc.com

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.